




PAVI2L-087030



PAVI4L-0513030


# PAVI

SUPERFICIE / SURFACE

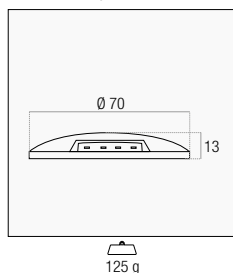

0,4 W	8 lm	100° ∠	24 V AC/DC	1 Luce / Light	3000K	<b>PAVI1L-047030</b>	6/24	€ 19,00
					4000K	<b>PAVI1L-047040</b>		
0,8 W	16 lm	100° ∠	24 V AC/DC	2 Luci / Lights	3000K	<b>PAVI2L-087030</b>	6/24	€ 23,00
					4000K	<b>PAVI2L-087040</b>		

INCASSO / RECESSED

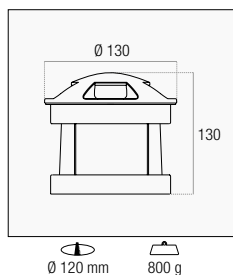


5 W	160 lm	100° ∠	24 V AC/DC	Grigio / Grey	2 Luci / Lights	3000K	<b>PAVIC2L-0513030</b>	1/6	€ 74,00
						4000K	<b>PAVIC2L-0513040</b>		
					4 Luci / Lights	3000K	<b>PAVIC4L-0513030</b>		
						4000K	<b>PAVIC4L-0513040</b>		

Controcassa in policarbonato inclusa  
Casing in polycarbonate included

OUTDOOR

Calpestabile luce radente a superficie o a incasso per installazione a pavimento. Corpo in alluminio, cavo in neoprene. Resistenza a pressione di 500 Kg.

Walkable surface or recessed glencing light for floor installation. Aluminum body, neoprene cable. Maximum resistance to pressure of 500 Kg.

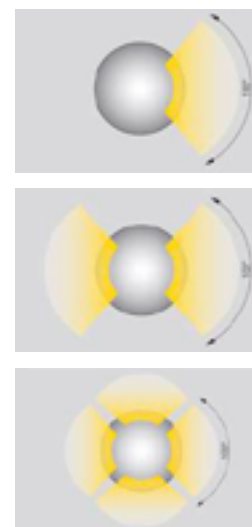

1, 2 o 4 luci con angolo di 100°  
1, 2 or 4 lights with 100 ° angle

Alimentatori, connettori e accessori  
Power supplies, connectors and accessories  
**PAG. 191**