


# TECHNOLOGY



Antisfarfallio  
Flicker Free

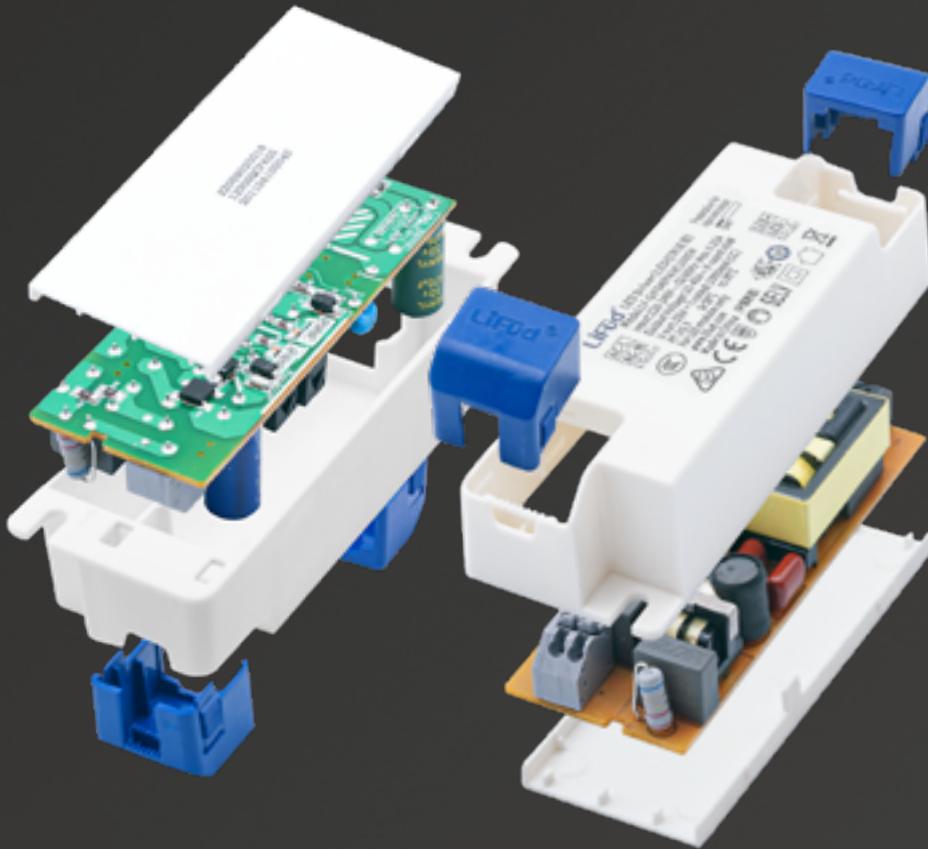


Per pannelli ad alta luminosità  
For high brightness panels



Lunga durata  
Long life



Garanzia  
Warranty

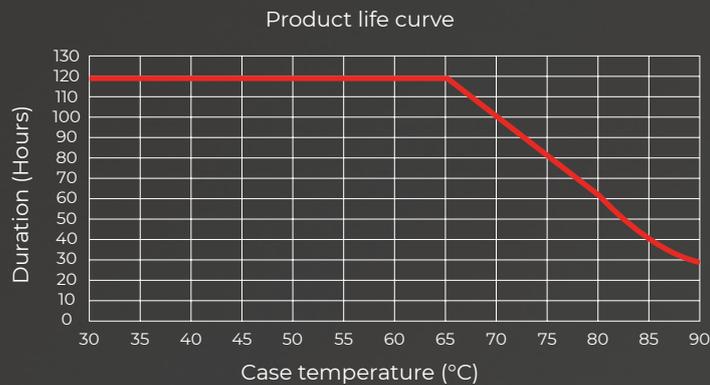


Alimentatore antisfarfallio ad altissima affidabilità.  
Highly reliable anti-flicker power supply.


**NEW**

PANNELLI - ACCESSORI


# DRIVER




55 g




79 g




117 g




119 g



215 g



274 g



150 g

INPUT		OUTPUT					
12 W	300 mA ± 5%	220-240 V/AC 50/60 Hz	38 V/DC	No Dimm.	<b>RDPQ12</b>	1/50	€ 11,00

INPUT		OUTPUT					
18 W	300 mA	220-240 V/AC 50/60 Hz	54 V/DC	No Dimm.	<b>RDPQ18</b>	1/100	€ 11,00
24 W	600 mA ± 5%	220-240 V/AC 50/60 Hz	36 V/DC	No Dimm.	<b>RDPQ24</b>	1/100	€ 13,00
			24-42 V/DC	No Dimm.	<b>RDPQA24</b>	1/100	€ 17,00

INPUT		OUTPUT					
42 W	950 mA ± 5%	100-240 V/AC 50/60 Hz	30-40 V/DC	No Dimm.	<b>RDPQA42</b>	1/100	€ 30,00
	1000 mA	220-240 V/AC 50/60 Hz	25-42 V/DC	No Dimm.	<b>RDPQA42120</b>	1/100	€ 22,00



INPUT		OUTPUT					
64 W	850 mA ± 5%	220-240 V/AC MAX 0.35 A	33-40 V/DC	No Dimm.	<b>RDPQA64</b>	1/50	€ 23,00



DIMMERABILE 1-10V		INPUT		OUTPUT				
42 W	850-1050 mA (CC)	220-240 V/AC 50/60 Hz MAX 0.3 A	25-40 V/DC	1-10 V	<b>DRIMPQ42</b>	1/50	€ 40,00	



DIMMERABILE TRAILING EDGE		INPUT		OUTPUT				
42 W	1050 mA ± 5%	170-265 V/AC 50/60 Hz	30-44 V/DC	10%-100%	<b>DRIMPQ40</b>	1/50	€ 50,00	



DIMMERABILE DALI		INPUT		OUTPUT				
40 W	550-1050 mA	220-240 V/AC MAX 0.3 A	20-42 V/DC	DALI 2 - PUSH DIM	<b>DRIMPQ42D NEW</b>	1/100	€ 54,00	



Funzione multicorrente 550-1050 mA per alimentare diverse tipologie di apparecchi LED.  
550-1050 mA multi-current function for different types of LED luminaires.

