


# LED WAND- / DECKENLEUCHE ARNOLD



Farbwahlschalter  
3.000 K | 4.000 K | 6.500 K


Steckklemme  
max. 4 x 2,5 mm<sup>2</sup>

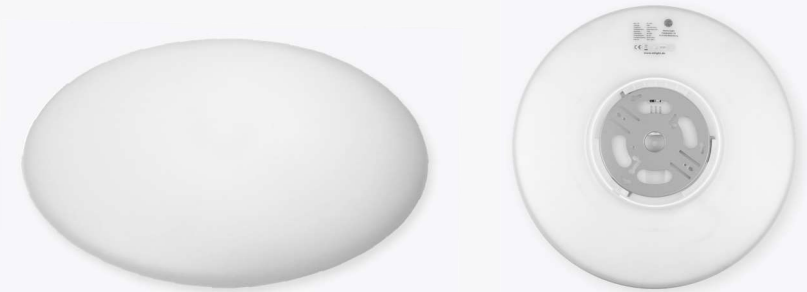

indirekter Lichtkranz  
up 10 % / down 90 %



Deckenplatte aus Metall  
Befestigung mittels  
Bajonettverschluß



Art.Nr.	W	V	K	mittl. LD	Lm	Winkel	EEK	Ø mm	H mm
81-2020	18W	230V	3.000 K	40.000 h	1.400	110°	F	300	49
	18W	230V	4.000 K	40.000 h	1.530	110°	F	300	49
	18W	230V	6.500 K	40.000 h	1.450	110°	F	300	49
81-2021	30W	230V	3.000 K	40.000 h	2.350	110°	F	400	49
	30W	230V	4.000 K	40.000 h	2.550	110°	F	400	49
	30W	230V	6.500 K	40.000 h	2.400	110°	F	400	49

- Deckenleuchte mit indirekt abstrahlendem Lichtkranz
- 10 % uplight / 90 % downlight
- Lichtfarben auf der Rückseite der Leuchte einstellbar
- opale Abdeckung und Gehäuse aus Polycarbonat
- Montage mittels Bajonettverschluß
- Leuchte mit integriertem LED Treiber, Phasenabschnitt dimmbar
- Anschluß über Steckklemme (2 x 2-PIN)



81-2020



81-2021