




Art.Nr.	W	V	K	mittl. LD	Lm	mA	Winkel	Ø mm	H mm
UGR<19									
81-2080	50 W	230 V	3.000 K	50.000 h	4.930 lm	1.050 mA	90°	610	11
81-2081	50 W	230 V	4.000 K	50.000 h	5.300 lm	1.050 mA	90°	610	11
STANDARD									
81-2065	48 W	230 V	4.000 K	40.000 h	4.800 lm	1.050 mA	110°	610	11

- LED Pendelleuchte inkl. Abhängeset ca. 1.5 m, höhenverstellbar
- Down: 70 % / Up: 30 %
- Gehäuse aus Aluminium, Baldachin aus Metall, weiß
- Microprismatische Diffusorplatte aus PMMA
- Leuchte mit externem LED Treiber im Baldachin
- optional DALI / 1-10 V / PUSH dimmbar mit 81-9020

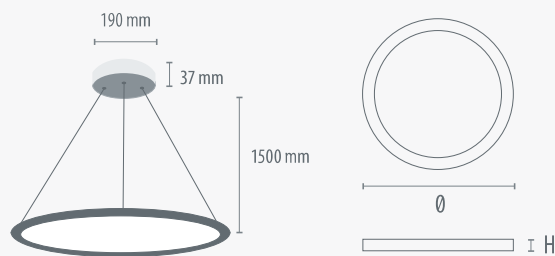

81-2080



81-2081



81-2065