

T5 Emergency F8W/T5/129 0000382



Product features



PRODUCT OVERVIEW

Product name	F8W/T5/129
Technology	Fluorescent
Watt (Rated) (W)	7.30
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940242
E-number SE	8356709
E-number Norway	3822410
Useful luminous flux (Fuse)	400
Luminous flux (lm)	400
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	55
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	530
CRI (Ra)	53
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	8.00
Dimmable	Yes
Average life (Nominal) (h)	10000
Product EAN number	5410288003825

DATA TABLE

General data

Product name	F8W/T5/129
Technology	Fluorescent
Watt (Rated) (W)	7.30
Lamp shape	Tubular shape
Cap/Base	G5
Lamp finish	Frosted/Coated

T5 Emergency

F8W/T5/129
0000382

Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4940242
E-number SE	8356709
E-number Norway	3822410

Optical data

Useful luminous flux (Fuse)	400
Luminous flux (lm)	400
Luminous flux (Rated) (lm)	400
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	55
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	530
CRI (Ra)	53
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Luminous Intensity (cd)	Not Applicable
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.88
Rated lumen maint. factor (%) at 4000 h 50Hz	0.82
Rated lumen maint. factor (%) at 6000 h 50Hz	0.78
Rated lumen maint. factor (%) at 8000 h 50Hz	0.75

Electrical data

Wattage (W)	8.00
Current (A)	0.145
Primary Supply/Product voltage - min (V)	48.0
Primary Supply/Product voltage - max (V)	64.0
Control gear required	Yes
Dimmable	Yes
Drive current (mA)	145
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	9

Lifetime data

Average life (Nominal) (h)	10000
Average life (Rated) (h)	10000
Rated survival factor (%) at 2000 h 50Hz	1.00
Rated survival factor (%) at 4000 h 50Hz	0.99
Rated survival factor (%) at 6000 h 50Hz	0.96

T5 Emergency

F8W/T5/129
0000382

Rated survival factor (%) at 8000 h 50Hz 0.83

Physical data

Nominal Product Length (mm)	300.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	288.3
Length base to pin Min-Max (mm) - B	293.0-295.4
Max. Lamp Length (mm) - C/L	302.5
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.028


Packaging

Product EAN number	5410288003825
Packaging single length / height (cm)	30.53
Packaging single width (cm)	1.73
Packaging single depth (cm)	1.7
DUN14 (inner)	25410288003829
Units per inner package	25
Packaging inner length / height (cm)	9.93
Packaging inner width (cm)	32.17
Packaging inner depth (cm)	9.8
DUN14 (outer)	15410288003822
Units per outer package	500
Packaging outer length / height (cm)	41.4
Packaging outer width (cm)	51.7
Packaging outer depth (cm)	33.7

Safety data


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY

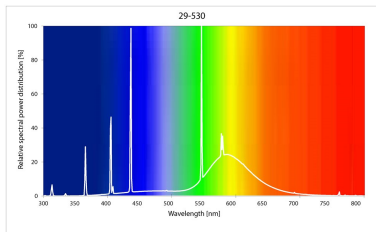


TECHNICAL DRAWINGS

T5 Emergency
F8W/T5/129
0000382



ENERGY
SYLVANIA
0000382

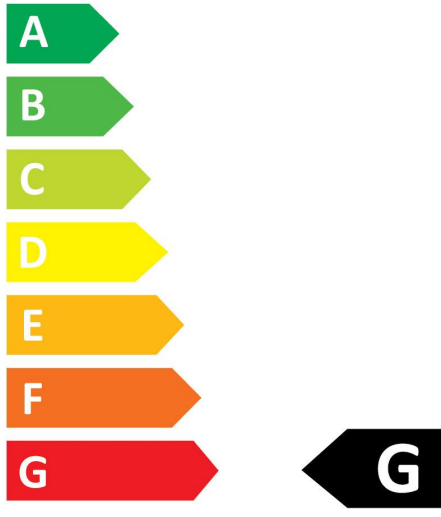

8
kWh/1000h



2019/2015

T5 Emergency
F8W/T5/129
0000382



0000382



8
kWh/1000h



2019/2015